


Installation cable Solarix CAT5E FTP PVC+PE



F_{ca}

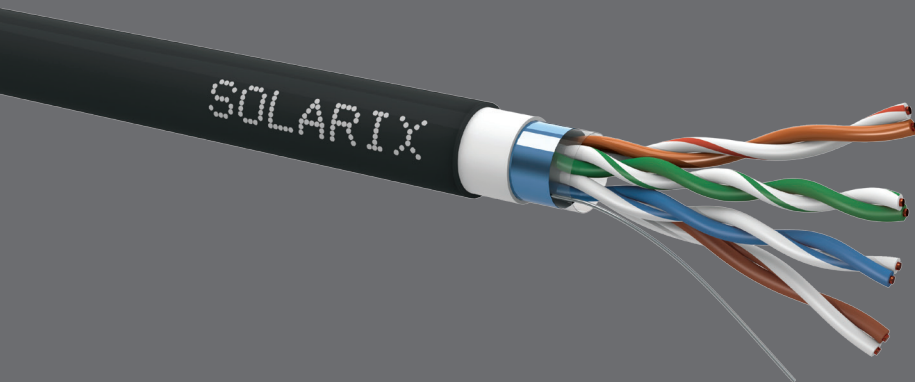

Product number:
27655197

Type number:
SXKD-5E-FTP-PVC+PE

EAN barcode:
8595684701289



Key features

- High quality shielded category 5E/Class D installation cable with double jacket for outdoor use
- Designed for ethernet protocols, including 2.5GBASE-T and 5GBASE-T*
- F/UTP cable construction
- PVC (inner) sheath and PE UV resistant (outer) sheath with F_{ca} reaction to fire class
- Cable conductors are made of high-quality copper wire with 99.97% purity
- The cable meets the ISO/IEC 11801, EN 50173, and ANSI/TIA 568.2-E cabling standards

Fire classification

Reaction to fire class	F _{ca}
Assessment and verification	AVCP 4 system
Declaration of performance	M 110-SXKD-5E-FTP-PVC+PE-Fca-01
Sheath type	PVC (inner) and PE (outer), UV resistant

Cabling standards

General standards	EN 50173-1, EN 50173-2, ISO/IEC 11801-1, ISO/IEC 11801-2, ANSI/TIA 568.2-E
Product standards	EN 50288-2-1, IEC 61156-5

Supported protocols

	10BASE-T	100BASE-TX	1000BASE-T	2.5GBASE-T	5GBASE-T
Supported by the SXKD-5E-FTP-PVC+PE cable	YES	YES	YES	YES*	YES*

*) For the 2.5GBASE-T and 5GBASE-T protocols, the operability success and distance achieved may vary depending on the type and quality of installation.



Supported PoE types

	802.3af	802.3at
PoE type	Type 1	Type 2
Maximum current	350 mA	600 mA
No. of pairs used	2	2
Supported by the SXKD-5E-FTP-PVC+PE cable	YES	YES

Physical parameters

Cable construction	F/UTP
Number of pairs	4
Pairs colouring	orange, blue, green, brown
Shielding	overall foil
Foil material	Al/Mylar
Conductor type and size	copper wire \varnothing 0.50 mm \pm 0.005 mm (AWG 24)
Conductor insulation	HDPE
Conductor diameter with insulation	1.00 mm \pm 0.05 mm
Conductor material	copper with 99.97% purity
Inner sheath thickness	0.55 mm \pm 0.05 mm
Inner sheath colour	grey RAL 7035
Inner sheath material	PVC
Outer sheath thickness	0.55 mm \pm 0.05 mm
Outer sheath colour	black RAL 9005
Outer sheath material	LLDPE, UV resistant
Ingress protection	IP 67
Cable diameter	7.4 mm \pm 0,5 mm
Ground wire	tinned copper wire \varnothing 0.45 mm \pm 0.005 mm
Net cable weight	53.1 kg/km

Electrical parameters

NVP	68%
Propagation delay	535 ns/100 m
Delay skew	\leq 45 ns/100 m
Dielectric strength	1 kV DC or 0.7 kV AC for 1 min, or 2.5 kV DC or 1.7 kV AC for 2 s
Insulation resistance	\geq 5 000 M Ω x km
Resistance imbalance	\leq 2%

Electrical parameters of Solarix unshielded category 5E cables (at 20 °C).

f (MHz)	Attenuation (dB/100m)	NEXT (dB)	PSNEXT (dB)	Prop. Delay (ns/100m)	ACR-F (dB/100m)	PSACR-F (dB/100m)	Return Loss (dB)
1	1.94	83.24	82.43	534.95	76.30	72.75	32.03
4	3.89	71.20	69.89	516.29	64.02	60.40	33.38
8	5.52	68.88	66.19	510.89	58.02	53.00	35.09
10	6.18	69.88	66.88	509.48	55.08	51.28	36.05
16	7.83	66.11	63.11	507.05	52.09	49.08	43.10
20	8.77	66.90	63.82	506.03	49.66	46.58	41.27
25	9.81	65.40	60.58	505.18	43.65	41.21	40.07
31.25	11.00	57.77	55.07	504.40	45.14	42.54	39.08
62.5	15.67	53.31	51.59	502.45	38.30	35.30	34.07
100	19.86	52.37	50.12	501.44	34.68	31.91	33.31

Installation and storage


Min. bending radius during installation	4x cable diameter
Max. tensile strength	100 N (4x 25 N/pair)
Segregation classification	type c according to EN 50174-2
Temperature during installation	0 to 50 °C
Operating temperature	-20 to 70 °C
Storage temperature	-20 to 70 °C


Logistic parameters

Length	305 m/reel
Number of reels per pallet	36 (large pallet), 27 (small pallet)
Reel size (ø x v)	380 mm x 240 mm
Pallet dimensions (w x d x h)	1140 mm x 1140 mm x 1320 mm (large pallet) 1140 mm x 1140 mm x 1080 mm (small pallet)
Pallet weight	819 kg (large pallet), 660 kg (small pallet)
Batch and product numbers barcode	IDAutomation Code 39, ANSI/ISO/AIM specification
EAN barcode	EAN-13

Cable label

CE

Product Code: 
Kód produktu:
Kod výrobu: * 2 7 6 5 5 1 9 7 *

Batch No.: 
Číslo šarže:
Numer partii: * 1 0 1 7 1 6 4 5 *


SOLARIX

INTELEK LTD
Ericha Roučky 1291/4, 627 00 Brno, CZ
17

DoP: M110-SXKD-5E-FTP-PVC+PE-Fca-01

EN 50575:2014 including A1:2016

SXKD-5E-FTP-PVC+PE
Installation Cable/Instalační kabel/Kabel instalacyjny
Solarix CAT5E FTP PVC+PE F_{ca} 305m


8 595684 701289

Product info/Info o produktu/Info o produkcie:
www.solarix.info, info@solarix.info
+420 840 505 555

Electric cable intended for supply of communication in buildings and other civil engineering works with the objective of limiting the generation and spread of fire and smoke./Kabel určený pro komunikaci v budovách a dalších inženýrských stavbách s cílem omezení vzniku a šíření požáru a kouře./Kabel przeznaczony do komunikacji w budynkach i innych obiektach budowlanych w celu ograniczenia powstawania oraz rozprzestrzeniania się ognia i dymu.

Reaction to Fire/Reakce na oheň/Reakcja na ogień: F_{ca}
Dangerous Substances/Nebezpečné látky/Niebezpieczne substancje: NPD

Solarix warranties

Standard warranty	5 years
System warranty	30 years

RoHS and REACH

RoHS	does not contain any of the substances listed in Annex II of the EU directive no. 2015/863
REACH	does not contain any of the substances from the ECHA list



Related products

Product Number	Type Number	Description
24000145	SX24HD-5E-STP-SL	Patch panel Solarix 24x RJ45 CAT5E STP 0.5U
24200244	SX24HDM-0-STP-SL-UNI	Unloaded Patch panel Solarix 24 port Stainless 0.5U
24000040	SX24-5E-STP-BK-N	Patch panel Solarix 24x RJ45 CAT5E STP 1U
24000100	SX24M-0-STP-BK-UNI-N	Unloaded Patch panel Solarix 24 port Black 1U
25286502	SXKJ-5E-STP-BK	Keystone Solarix CAT5E STP RJ45 Black
25286702	SXKJ-5E-STP-BK-SA	Keystone Solarix CAT5E STP RJ45 Black Toolless
25286712	SXKJ-5E-STP-BK-SA	MULTIPACK 24 pcs - Keystone Solarix CAT5E STP RJ45 Black Toolless
25286704	SXKJ-5E-STP-BK-NA	Keystone Solarix CAT5E STP RJ45 Black for SXKJ-NA-BU
25286714	SXKJ-5E-STP-BK-NA	MULTIPACK 24 pcs - Keystone Solarix CAT5E STP RJ45 Black
23100092	SX9-2-5E-STP-WH	Outlet Solarix CAT5E STP 2x RJ45 Wall-Mount White
23100096	SX9-1-5E-STP-WH	Outlet Solarix CAT5E STP 1x RJ45 Wall-Mount White
11578804	KRJS45/5SLD	Modular Plug 8p8c CAT5E Shielded for Solid Cable
11910000	SXRJ45-5E-STP-BK-SA	Universal Industrial Plug RJ45 CAT5E STP Toolless
13180089	KRJS45-VEB5	Connection Box CAT5E STP 8p8c LSA+/Krone