


SXKJ-10G-STP-BK-NA

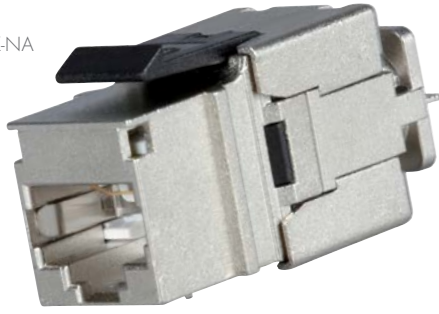

SOLARIX CATEGORY 6A

Keystone Jacks – Quick Tool

10 Gbps

500 MHz

FORCE

4PPoE

Number of Ports	1 x RJ45
Life Cycle	1,000 plug insertions
PoE	4PPoE
Contact Material	50 µin gold
Termination Block	Quick tool
Conductor Size and Type	AWG 26 – 22, solid
Other Material	FR according to UL94V-0
Storage Temperature	-40 to +70 °C
Operation Temperature	-10 to +60 °C
Max. Humidity Operation	93 %

These Solarix Category 6A keystones enable quick and comfortable termination using the superfast and easy to use quick tool SXKJ-NA-BU. The keystones are tested up to 500 MHz and fully meet all electrical parameters specified in the ANSI/TIA 568C.2, ISO/IEC 11801, and EN 50173 standards. Their performance has been confirmed by the FORCE Technology laboratory. The independent testing authority has granted this Solarix product a Connecting Hardware Level certificate. Four pair PoE (i.e. 4PPoE) compatibility test according to IEC 60512-99-002 was also a part of the test procedure. Similarly to all other Solarix keystones, these Solarix Quick Tool keystone jacks are also very reliable and trouble free. They feature colour-coding for both T568A and T568B wiring using colour-coded wiring labels. Their new contact design provide enhanced plug to jack connection integrity and enables for 1,000 plug insertions.

Part No.

Description

SXKJ-10G-STP-BK-NA

Keystone Solarix CAT6A STP Quick Tool RJ45 Black

SXKJ-NA-BU

Quick Tool for Terminating SXKJ-XX-YYY-BK-NA keystones

SXKJ-10G-STP-BK-NA



SXKJ-NA-BU



+420 840 505 555 • info@solarix.cz
www.solarix.cz

